





DK007 Series

Bottom Side



Top Side

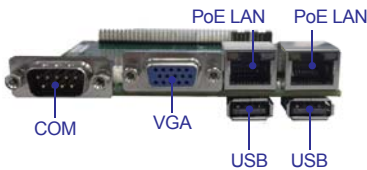

▣ Evaluation Carrier Board for 2I385PW / 2I847PW

▣ Features

- Flexible interface for verification
- Expedite customer's carrier board development
- Dimension: 102 x 96 mm
- Interface: 2 x mini PCIe, 2 x SIM holder, 2 x USB 2.0, 2 x RJ45 (PoE), PWR / HDD / LAN LED (wafer), 4 x COM, 1 x VGA, Line-out, Mic-in

Specification:

| | | |
|-----------------|---------------------|--|
| Model Name | | DK007 |
| Compatible SBC | | 2I385PW / 2I847PW |
| IO Connector | DVI / HDMI | N/A |
| | VGA | 1 (D-SUB) |
| | USB | 2 x USB share with Mini-PCIe |
| | Serial | 4 x COM |
| | Ethernet | 2 x RJ45 (PoE) |
| | HD Audio | Line-out, Mic-in |
| | LED | Wafer |
| | DI / DO | MB Function |
| Expansion | Mini PCI Express | 1 (Full-size) PCIe / USB 1 (Full-size) USB |
| | SIM card Holder | 2 |
| | 80-pin Connector | 2 |
| | MircoSD card Holder | N/A |
| Dimension | | 102 x 96 mm |
| Power Input | | Corresponding to M/B power DC-IN +9~36V ; Li Battery Charger (Option) |
| Operating Temp. | | -20°C~70°C |