


Antenna Series

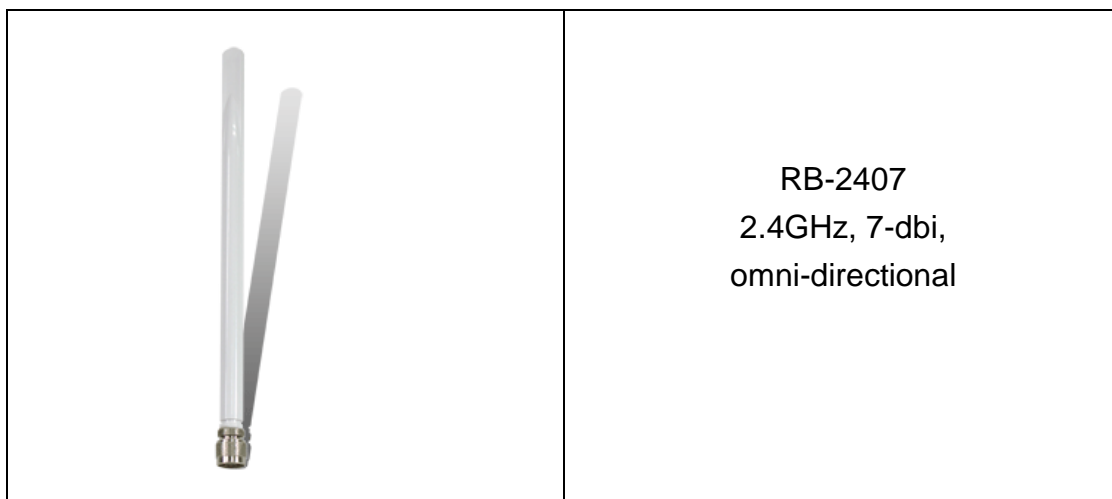

Frequency Range	2400- 2500 MHz
Impedance	50 OHMS
VSWR	2.0: 1 Max
Gain	7 dBi
Radiation	Omnidirectional
Polarization	Linear, Vertical
Beamwidth deg.	Horz. 360° Vert. 20°

Mechanical Properties

Connector	N- M
Temperature	-10°C to +55°C
Humidity	95% @ 55°C
Radome color	White
Material	ABS UV resistant
Size	∅ 13*250mm